



www.outdoorclassrooms.co.uk

Fitting notes for:- Sound bar & Fence Panels



Pack contents: Sound bar
3 x Fence Panels

Tools required for fitting:-

Digging Equipment
Fixing materials
Spirit level (optional)


Before any digging is carried out it is important to ensure there are no existing utility services buried beneath the desired placement points, i.e. electric, gas, water or drainage pipes. (Look for existing manhole covers).

Keep the temporary supporting boards on the legs whilst handling and

manoeuvring the Soundbar (until the final height check and fitting).

Place the Soundbar where you wish to site it. Using a spade, mark closely around the legs. Move the Sound bar to one side whilst digging the holes. The sound bar should be buried approximately 45-65cm deep. Remove turf and place aside for later use.

The holes should be fractionally wider in diameter than the legs. The depth required is dependent upon for the age and height of children, approximately 45-65cm. When satisfied with the final position remove the temporary boards. Carefully lower the sound bar into the holes, checking to ensure it is level and vertical (use a spirit level against the legs if needed). Set in with appropriate fixing materials and reinstate the turf.

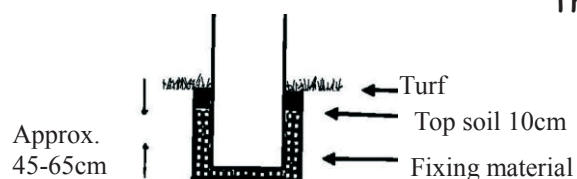

For the longevity of the Soundbar's decoration, reapply varnish when required.

If you require any further advice please contact us on 0113 2556342.

